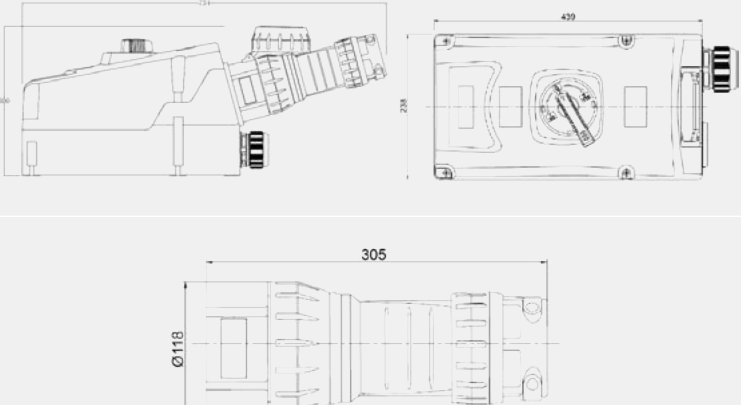


Sockets and plugs 125A, 5P + aux. contact

Photo	Schematic electrical	Dimensions	Order number
Current 125A, 5P + aux. contact			
	3P+NO+N+PE 		HSP1P 125 □ 5P W-SCT OC HSP1P 125 □ 5P PLG OC
Parameters			
Designed for Ex zones	Gases: 1 and 2 Dust: 21 and 22		
ATEX marking	Ⓔ II 2 GD Ex db eb IIC T4 Gb Ⓔ II 2 GD Ex tb IIIC T80°C Db		
Marking according to IECEx	Ex db eb IIC T4 Gb Ex tb IIIC T80°C Db		
Permissible ambient temperature	from -45°C to +40°C		
Degree of protection	IP66		
Rated current	125A		
Rated voltage	▶ 200~250V AC h9   code: AC250 ▶ 380~415V AC h6   code: AC415 ▶ 480~500V AC h7   code: AC500 ▶ 600~690V AC h5   code: AC690		
Number of poles	5P (3P+N+PE+NO)		
Lockable with a padlock	Yes		
Cable entry	wall socket: M63 cable gland (cable dia.: 34-46mm) + M63 plugged cable entry plug: 19-46mm		
Switch (socket)	YES, switching ON/OFF by rotary switch integrated into the socket cover		