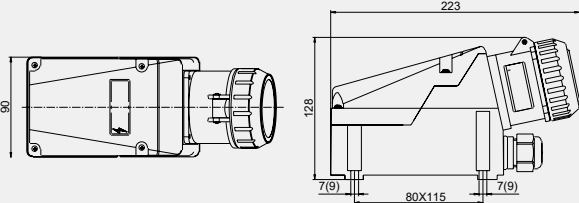

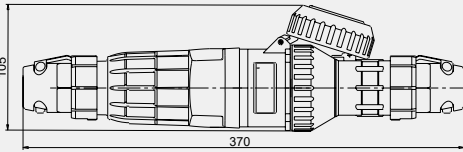


16A, 2P sockets and plugs

Photo	Schematic electrical	Dimensions	Order number
Current 16A, 2P			
			HSP1P 16 □ 2P W-SCT
			HSP1P 16 □ 2P PLG
			HSP1P 16 □ 2P C-SCT
Parameters			
Designed for Ex zones	Gases: 1 and 2 Dust: 21 and 22		
ATEX marking	Ⓔ II 2 G D Ex db eb IIC T5 Gb Ⓔ II 2 G D Ex tb IIIC T80°C Db		
Marking according to IECEx	Ex db eb IIC T5 Gb Ex tb IIIC T80°C Db		
Permissible ambient temperature	from -45°C to +60°C		
Degree of protection	IP66		
Rated current	16A		
Rated voltage	▶ 20~25V AC   code: AC25 ▶ 20~25V DC   code: DC25 ▶ 36~50V AC   code: AC50 ▶ 36~50V DC   code: DC50		
Number of poles	2P		
Lockable with a padlock	Yes		
Cable entry	wall socket: M20 cable gland (cable dia.: 7-16mm) + M20 plugged cable entry coupler socket: 5-15mm plug: 5-15mm		
Switch (socket)	Yes, ON/OFF switching by rotating the plug in the socket		